

# μFalcon-MX

## 10G Service Aggregation/Demarcation



- Local service aggregation/demarcation unit for business Ethernet and mobile backhaul
- Based on 3<sup>rd</sup> generation Falcon architecture
- Full set of MEF CE2.0 compliant services
- Wire-speed L3 routing and L2.5 (MPLS/MPLS-TP) forwarding
- Advanced QoS and service level traffic management
- Complete OAM toolbox (802.1ag, Y.1731, RFC2544, Y.1564) for OPEX reduction
- Advanced high speed protection mechanisms for link, path, and ring service resilience
- 2.5Gbps support on optical ports
- Extensive Sync and Timing options with SyncE, and IEEE1588-2008 (PTP)
- Compact design, low power consumption, fan-less design

### Product Overview

The **μFalcon-MX** is a compact, high performance, service aggregation and demarcation system, delivering high end Carrier Ethernet and IP/MPLS services.

This product extensively supports the evolving needs for broadband access services delivery, including high throughput, granular SLA enforcement and monitoring, flexible management capabilities, and a high degree of scalability and flexibility to cater for future requirements and technology trends.

Support for 2.5GE allows an intermediate step for high speed access (>1G) while avoiding the costs of 10G, as required in applications such as Wifi access points (802.11ac Wave 2).

**DS7083R0319**

The **μFalcon-MX** primarily addresses the rapidly-expanding market of mobile backhauling and business access applications.

The **μFalcon-MX's** extensible hybrid (ASIC-FPGA) Hardware architecture supports remote data plane upgrades.

The **μFalcon-MX delivers** a complete toolbox for precision timing based on SyncE, and PTP, suitable for all modes of mobile backhaul applications.

The **μFalcon-MX** series is equipped with 4x triple-rate SFP ports (100/1000/2500BaseX), 2x tri-speed Copper ports (10/100/1000BaseT) and 2x 1/2.5/10G SFP+ uplink ports. All ports can operate at full wire speed, with a total processing capacity of 34Gbps (non-blocking).

The **μFalcon-MX** offers advanced Quality of Service (QoS) features including classification and mapping based on layer 1 through layer 4 attributes, rate limiting per service, with highly flexible scheduling, queuing and shaping options (including HQoS).

All MEF defined services (EPL, EVPL, ELAN, etc) can be configured on the **μFalcon-MX** series and can also be protected through use of high performance mechanisms, based on G.8031, G.8032, etc., for link, path, and ring resilience.

Future models will support SDN and NFV capabilities.

These features make the **μFalcon-MX** highly comprehensive package that can handle virtually any network topology and type of service.

The system implements current OAM standards (802.3ah, 802.1ag, Y.1731 with HW assist as well as proactive measurements and alarming facilities.

To complete the OAM toolset, the **μFalcon-MX** has a built in packet generator and analyzer to implement RFC2544/Y.1564 for quick service turn-up and verification. The **μFalcon-MX** series is MEF CE2.0 compliant.

The system also supports MPLS/MPLS-TP (L2.5) and IP (L3) forwarding and services, to allow greater flexibility, wider application scope and extended interoperability with different network technologies.

The **μFalcon-MX** is housed in a highly compact, half-19", 1U chassis (150mm deep only), implements a fan-less design, and has an integrated internal, wide range AC or DC power supply.

## Technical Specifications

### Interfaces & Indicators

- 4 x 100/1000/2500BaseX (SFP)
- 2 x 10/100/1000BaseT (RJ45)
- 2 x 1/2.5/10G (SFP+)
- Supported SFP/SFP+: MM, SM, SFS, xWDM, Copper
- 1 x RS232 (RJ45) Console
- LEDs
  - CPU
  - Link/Activity (per port)
  - Sync
  - Alarm
  - Power

### Architecture & Forwarding

- Hybrid (ASIC-FPGA) HW architecture
- 256MB RAM, 256MB flash memory
- L2 forwarding (802.1D MAC bridging)
- Flow-based forwarding
- Performance: wire-speed, on all ports, all frame sizes
- Switching fabric: 34Gbps, non-blocking
- MTU: 10K bytes
- MAC table: 16K addresses
- VLANs: 4K concurrent
- Provider bridging: 802.1ad (Q-in-Q)
- Private VLANs
- L1-L4 ACLs
- *Multicast*:
  - IGMPv3 snooping
  - MLD snooping
  - Up to 8K MC groups
- *IP/MPLS (license enabled):\**
  - Static routes
  - OSPF, RIP, VRRP
  - PIM-SM, BGP-4
  - IPv4/IPv6
  - MPLS-TP: LER, PW, H-VPLS, BFD

### Quality of Service

- Classification based on L1-L4 information
- Ingress policing per flow (MEF BW profiles)
- Two rate, 3-color marking
- Hierarchical queuing/scheduling
- Hierarchical shaping
- Priority based flow control (802.1Qbb)
- Scheduling: Strict and DWRR (WFQ equivalent)
- 4 drop precedence levels w/ WRED and tail drop for CA
- P-bit and DSCP remarking
- Storm control: UC, MC, BC
- QoS Control Lists
- Compliant with 3GPP QoS requirements for LTE backhaul

## Protection

- **Link:**
  - Link aggregation: static or LACP
  - Link Protection
- Linear protection: G.8031
- Ring protection : G.8032v2
- Spanning tree: STP, RSTP, MSTP
- Loop protection

## OAM & Diagnostics

- IEEE802.3ah link OAM
- IEEE802.1ag CFM (HW assisted)
- ITU-T Y.1731 PM (HW assisted)
- RFC2544 traffic generator & analyzer (up to wire speed)
- L2/L3 loopbacks w/ MAC/IP swap
- Throughput metering
- SFP diagnostics (SFF-8472)
- Traffic mirroring and remote mirroring
- sFlow

## Management

- **Interfaces:**
  - CLI: Console (RS232), Telnet, SSH1/2
  - SNMP: v1/v2c/v3, extensive MIBs, trap profiles
  - Web: HTTP/HTTPS
  - Management VLAN
  - IPv6 management
- **Authentication:**
  - RADIUS, TACACS+
  - Multiple local users
  - User access levels (15)
  - Management ACLs
  - 802.1x (port/MAC based)
- DHCP client & relay (incl. option 82)
- Link discovery: LLDP, CDP snooping
- **Operations:**
  - Remote System Update (TFTP or Web)
  - Configuration upload/download (TFTP or Web)
  - Text based config files
- **Alarms:**
  - SNMP traps
  - Syslog (internal and remote server)
  - CLI events
  - Dying gasp (802.3ah or SNMP trap)
- Remote temperature reading & alarm
- Per port, EVC and CoS detailed statistics, RMON; NTPv4
- Integrated into the NetACE NMS

## Synchronization (S models)

- Synchronous Ethernet
- G.8261, G.8262
- ESMC (G.8264)
- **Physical interfaces:**
  - 2 x SMA connectors for 1PPS/CLK, in/out
- **IEEE1588-2008 (PTP):**
  - Ordinary Clock (master, slave)
  - Transparent Clock
  - Boundary Clock
- Built-in Stratum 3 clock

## Power & Environmental

- **Internal Power Supply**
- AC/DC: 100-240VAC, 50/60Hz or 125VDC
- 20-60VDC, ST connector
- **Power consumption:**
  - Maximum: <20W; typical: <15W
- **Operating temperature:**
  - Standard: -10°C ÷ +50°C (14°F ÷ 122°F)
  - Extended: -40°C ÷ +65°C (-40°F ÷ 149°F)
- Storage temperature: -40°C ÷ +80°C (-40°F ÷ 176°F)
- Humidity: 10-90%, non-condensing


## Physical

- Dimensions (HxWxD): 44x221x150mm (1.73x8.70x5.90 inch)
- Weight: ~0.8Kg (1.76 lb)
- **Mounting:**
  - Desktop
  - Rack
- Wall
- **Accessories:**
  - Power cable
  - RS232 cable (console)
  - Rack mounting kit (optional)

## Regulatory & Compliance

- **Safety:**
  - IEC EN60950-1
- **EMC:**
  - EN 300 386 V1.3.3: 05
  - FCC CFR 47 part 15, subpart B, Class A
- MEF: **CE2.0**
- CE
- RoHS

## Typical Application: Fixed Mobile Convergence

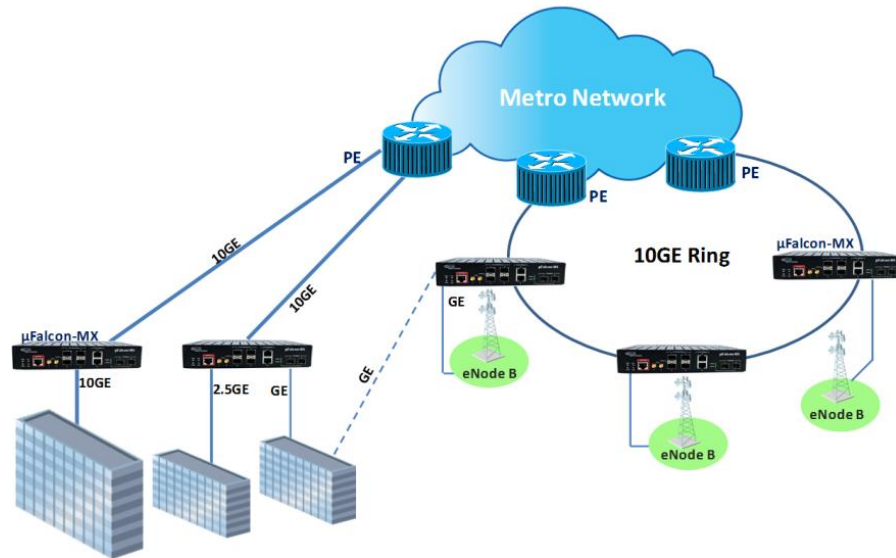

## Ordering Information

| Model          | Part # | Description   |
|----------------|--------|---|
| μFalcon-MX/A   | 7083   | Access Service Gateway, 4x100/1000/2500BaseX (SFP), 2x10/100/1000BaseT, 2x 1/10GE (SFP+), internal AC power supply, CE SW license                             |
| μFalcon-MX/D   | 7084   | Access Service Gateway, 4x100/1000/2500BaseX (SFP), 2x10/100/1000BaseT, 2x 1/10GE (SFP+), internal DC (20-60VDC) power supply, CE SW license                  |
| μFalcon-MX/S/A | 7085   | Access Service Gateway, 4x100/1000/2500BaseX (SFP), 2x10/100/1000BaseT, 2x 1/10GE (SFP+), Advanced Timing, internal AC power supply, CE SW license            |
| μFalcon-MX/S/D | 7086   | Access Service Gateway, 4x100/1000/2500BaseX (SFP), 2x10/100/1000BaseT, 2x 1/10GE (SFP+), Advanced Timing, internal DC (20-60VDC) power supply, CE SW license |

*Specifications are subject to change w/o prior notice*

**Fibrolan Ltd. (International)**  
Hacarmel 2, Yoqneam-Ilit, 2066724, Israel  
Tel: +972 (4) 959 1717  
Fax: +972 (4) 959 1718  
[info@fibrolan.com](mailto:info@fibrolan.com)

**Fibrolan Inc. (North America)**  
350 W Passaic St., Rochelle Park, NJ 07662  
Tel: (201) 843 1626  
Fax: (201) 843 1628  
[us-info@fibrolan.com](mailto:us-info@fibrolan.com)

**Fibrolan CEE GmbH. (Central/East Europe)**  
Kulturstraße 1  
A-2522 Oberwaltersdorf, Austria  
Tel.: +43 2253 21188 – 0  
Fax.: +43 2253 21188 – 99  
[office@fibrolan.at](mailto:office@fibrolan.at)

[www.fibrolan.com](http://www.fibrolan.com)